

CASE STUDY

Hebrew Academy
Cleveland Heights, OH




TIME SAVINGS
13 hours

TOTAL SAVINGS
\$2,232.25

Project Summary

Building type	School
Contractor	Geauga Mechanical
Building structure	Concrete
Services	VRF



Featured Products



FlexiStak



Fast Trak Track

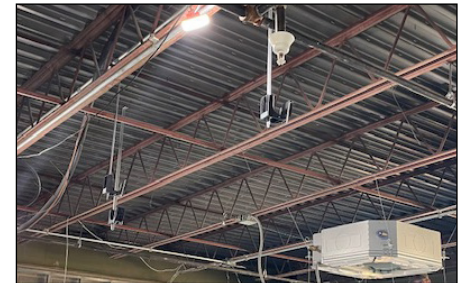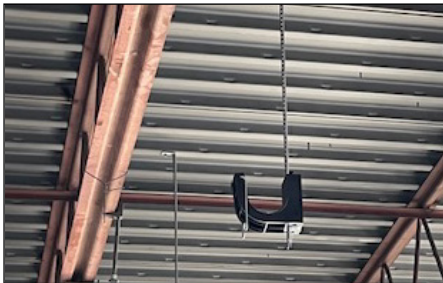

“Easily would have taken all day today to knock out hangers plus I did not have an answer on my elevation so being able to install and change after the fact is awesome.” - Bob Berman, Project Manager, Geauga Mechanical

COST SAVING SUMMARY

	Gripple solution	Traditional method
Overview	FlexiStak / Fast Trak Tracks / Tapcon Screws	Beam Clamps, 3/8" Threaded Rod, 3/8" nuts, Tear drop hangers, 6' UniStrut
Material cost	\$328.50	\$1,260.75
Installation time	3 hours / 2 installers	16 hours / 2 installers
Labor rate (per hour)	\$50/hour	\$50/hour
Total labor cost	\$300	\$1,600
TOTAL COST	\$628.50	\$2,860.75