

Barrel End Fixing



For the suspension of HVAC, Mechanical, Lighting & Electrical services in an indoor stationary setting.
NOT suitable for use in chlorinated / swimming pool environments.

APPLICATION / MATERIAL SPECS

Attaches to any 1/4" or 3/8" male thread product.

MATERIAL

Cable: Galvanized high tensile steel cable to EN12385.

Standard lengths from 5ft-30ft, other lengths can be made to order.

	No. 1	No. 2	No. 3
Cable Dia. (in.)	1/16"	5/64"	1/8"
Strand configuration	7x7	7x7	7x7

Barrel: Zinc plated steel


* Refer to fastener load ratings and safety factors.

BARREL

Cable with crimped
Barrel end fixing*




SIZE SPECS

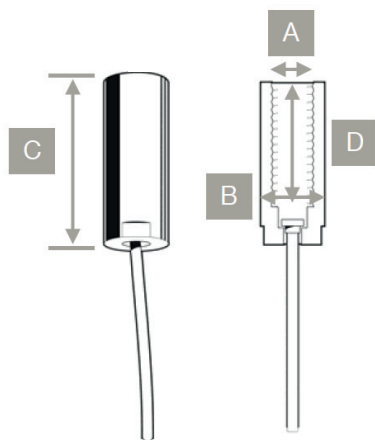


Size	A (in.)	B (in.)	C (in.)	D (in.)
No. 1	1/4"	7/16"	1 3/4"	1"
No. 2	1/4"	7/16"	1 3/4"	1"
No. 2	3/8"	1/2"	1 3/4"	1"
No. 3	3/8"	1/2"	1 3/4"	1"

APPLICATION EXAMPLES



On suspended ceilings
By attaching to Gripple's
T-Bar Twist Clips.



Track Lighting
In conjunction with a
1/4" or 3/8" male thread



Signage
In conjunction with a
1/4" or 3/8" male thread

SUB-BARREL-US

www.gripple.com

Gripple's policy is one of continuous development and innovation.
We therefore reserve the right to alter specifications, etc. without notice.



Gripple Inc | 1611 Emily Lane | Aurora, IL 60502 | USA

Tel +1 866 474 7753 Fax +1 800 654 0689 Email grippleinc@gripple.com