

Cladding Hook End Fixing



The suspension of HVAC, Mechanical, Lighting & Electrical services in an indoor stationary setting.
 NOT suitable for use in chlorinated / swimming pool environments.

APPLICATION / MATERIAL SPECS

Metal decking roof structures. Fits into a 1/4" hole.

MATERIAL

Cable: Galvanized high tensile steel cable to EN12385.
 Standard lengths from 5ft-30ft, other lengths can be made to order.

	No. 1	No. 2
Cable Dia. (in.)	1/16"	5/64"
Strand configuration	7x7	7x7

Cladding Hook: Zinc plated steel


* Refer to fastener load ratings and safety factors.

CLADDING HOOK

Cable with Cladding Hook end fixing*



SIZE SPECS

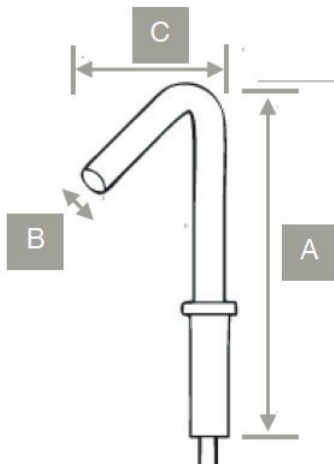

Size	A (in.)	B (in.) ϕ	C (in.)
No. 1	2 3/8"	1/4"	15/16"
No. 2	2 3/8"	1/4"	15/16"

INSTALLATION



Metal Decking Roof Structures

Fits into a pre-drilled 1/4" hole

SUB-CLADDING-US

www.gripple.com

Gripple's policy is one of continuous development and innovation.
 We therefore reserve the right to alter specifications, etc. without notice.



Gripple Inc | 1611 Emily Lane | Aurora, IL 60502 | USA

Tel +1 866 474 7753 Fax +1 800 654 0689 Email grippleinc@gripple.com