

# Gripple Eyebolt

Threaded bolt with a closed loop at the end, ideal for suspending services using loops or hooks.


## PRODUCT INFORMATION

- Available in wide variety of sizes, lengths and thread lengths, to suit a range of installations
- Load rated 0 - 325kg
- 5:1 safety factor
- Available in M8 and M10 threads
- Available fully threaded or partially threaded




## INSTALLATION (example)

1. Drill hole with drill bit and clear off dust and fragments using a wire brush.
2. Hammer anchor in.
3. Set installation with purpose-made expansion cone tool.
4. Setting tool leaves marks when correctly installed.

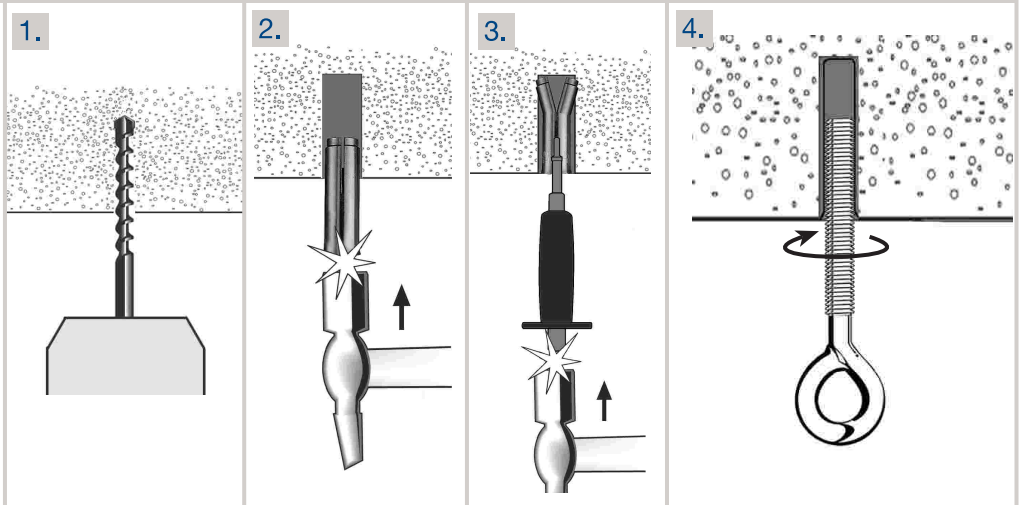

## EYEBOLTS

Size	A mm	B mm	C mm	D mm
M8-200mm-part threaded	8	15	98	230
M8-130mm -fully threaded	8	14	130	168
M8-0.2m-fully threaded	8	15	190	230
M10-200mm-part threaded	10	15	98	230
M10-130mm-fully threaded	10	14	130	174
M10-0.2m-fully threaded	10	15	190	230

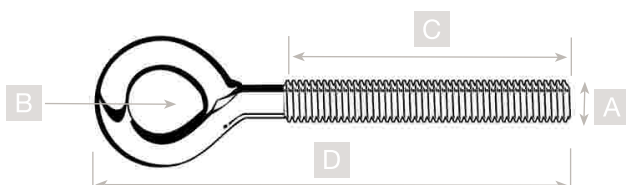

## Important Information

1. Construction materials and conditions vary on different sites. If it is suspected that the base material has insufficient strength to achieve a suitable fixing, contact Gripple Ltd. The responsibility for judgement of base material strength lies with the installer, and not with Gripple Ltd.
2. The information and recommendations given herein are believed to be correct at time of writing. The data has been obtained from tests done under laboratory, or other controlled conditions and it is the users responsibility to use the data given in light of conditions on site, taking account of the intended use of the products concerned.
3. Whilst Gripple Ltd can give general guidance and advice, the nature of Gripple products means that the ultimate responsibility for selecting the correct product for a particular application must lie with the customer.
4. All products must be used, handled and applied in accordance with current product instructions and manufacturers recommendations for use, published by Gripple Ltd.
5. Gripple's policy is one of continuous development and innovation. We therefore reserve the right to alter specifications, etc. without notice.