


Standard Hanger




Cable hanger with fastener for the fast suspension of a variety of services in an indoor stationary setting. NOT suitable for use in chlorinated / swimming pool environments.

FEATURES / BENEFITS

- Up to six times faster to install than traditional hanging systems
- Versatile and simple to use
- Strong, safe and industry approved
- Aesthetically discreet and lightweight
- Supplied in ready-to-use kits, comprising a length of cable and pre-attached end fixing, and a Release Key

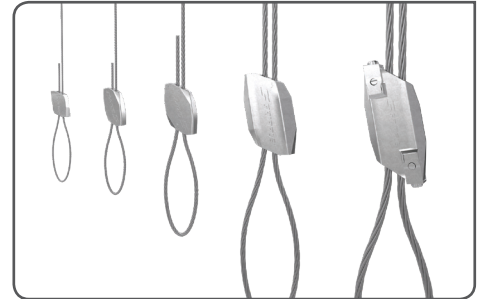


INSTALLATION & ADJUSTMENT

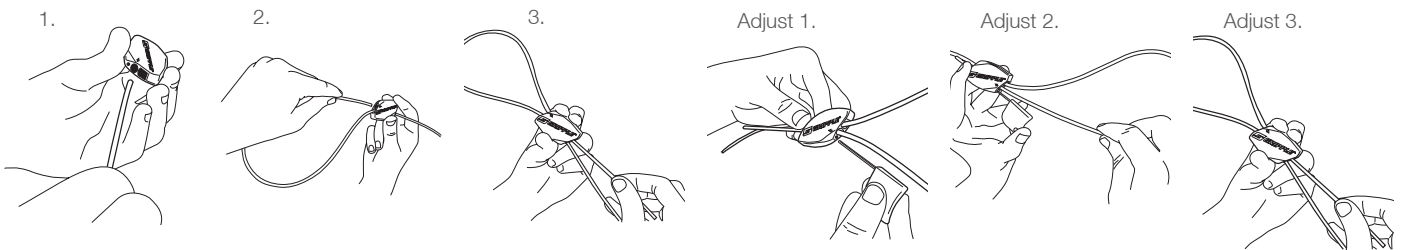

Ensure a minimum 3 inches of tail cable exits the hanger.

SIZE SPECS

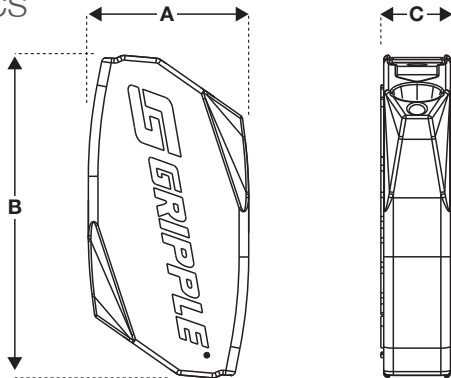

Dimension	No.1 (inches)	No.2 (inches)	No.3 (inches)	No.4 (inches)	No.5 (inches)
A	0.63	0.71	1.02	1.47	1.69
B	0.94	1.34	1.69	2.44	4.17
C	0.24	0.31	0.31	0.43	0.51

AVAILABLE END FIXINGS



For more options on available end fixings please contact us or visit www.gripple.com

CABLE SPECS

Galvanized high tensile steel cable to EN12385. Standard lengths from 5ft-30ft, other lengths can be made to order.

	No.1	No.2	No.3	No.4	No.5
Cable Diameter	1/16"	5/64"	1/8"	3/16"	1/4"
Strand Configuration	7x7	7x7	7x7	7x19	7x19
Min. Breaking Load	125 lbs	500 lbs	1000 lbs	2475 lbs	3575 lbs
Max. Safe Working Load	25 lbs	100 lbs	200 lbs	495 lbs	715 lbs
Tensile Strength (lbs/sq.in.)	256,700	256,700	256,700	256,700	256,700

FASTENER SPECS

- Housing** - Type ZA2 Zinc
- Wedge** - Sintered steel hardened to min. 56 Rockwell C
- Spring** - Stainless Steel (Type 302)
- End Cap** - No.1-4: UV stabilized homopolymer propylene; No.5: Type ZA2 Zinc
- Screws** - No.5 only: Stainless Steel (Type 304)

Safe Working Loads:

- No.1 - up to 25 lbs
 - No.2 - up to 100 lbs
 - No.3 - up to 200 lbs
 - No.4 - up to 495 lbs
 - No.5 - up to 715 lbs
- All with a 5:1 safety factor

PI-STDHANGER-US

www.gripple.com

Gripple's policy is one of continuous development and innovation. We therefore reserve the right to alter specifications, etc. without notice.



Gripple Inc | 1611 Emily Lane | Aurora, IL 60502 | USA

Tel +1 866 474 7753 Fax +1 800 654 0689 Email grippleinc@gripple.com