


## SEISMIC CABLE BRACING

### Cable Bracing Kit:

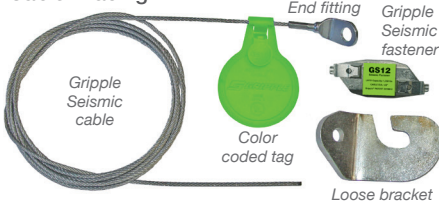

### Gripple Seismic Cable:

Break strength certified, pre-stretched Gripple Seismic cable. Available in lengths of 10, 15, and 20 ft

### End Fittings:

45° Eyelet, (E) Standard Bracket (S), or Double Bracket (DS)

### Color Coded Tags:

Pre-assembled color coded tags for easy field verification of cable diameter: GS10=Red; GS12=Green; GS19=Yellow; GS25=Purple

### Gripple Seismic Fasteners:

Design Strength (LRFD\*): GS10=350 lbs; GS12=1,050 lbs; GS19=2,100 lbs, GS25=3,850 lbs

\* Load and Resistance Factor Design

### Loose Brackets:

Standard Bracket (GSS) or Retrofit Bracket (GSR)

## PRODUCT INFORMATION

**FUNCTION** - For bracing and securing suspended nonstructural equipment and components.

**APPLICATION** - Ideal for Transverse, Longitudinal, or 4-Way bracing of nonstructural components and equipment requiring seismic design, especially in essential facilities that are required for emergency operations in the aftermath of an earthquake. NOT suitable for use in chlorinated / swimming pool environments.

### MATERIAL SPECIFICATION -

**Cable:** Break strength certified, pre-stretched Gripple Seismic cable. Manufactured to ASTM A1023, ASTM A931. Available in standard lengths of 10 ft, 15 ft, and 20 ft.

	GS10	GS12	GS19	GS25
Cable Diameter (in.)	5/64	1/8	3/16	1/4
Strand configuration	7 x 7	7 x 7	7 x 19	7 x 19
Design Strength (LRFD*) (lbs)	350	1,050	2,100	3,850

### End Fittings:

45° Eyelet - Zinc plated steel  
Standard Bracket - AISI 1050 Steel minimum UTS 725MPa pre-attached to cable via an aluminum ferrule  
Double Bracket - AISI 1050 Steel minimum UTS 725MPa pre-attached to cable via an aluminum ferrule


### Seismic Fasteners:

Housing - Type ZA2 Zinc  
Wedge - Sintered steel hardened to min. 56 Rockwell C  
Spring - Stainless Steel (Type 302)  
End Cap - Type ZA2 Zinc  
Screws - Stainless Steel (Type 304)


### Loose Brackets:

AISI 1050 Steel minimum UTS 725MPa


## APPLICATION EXAMPLES

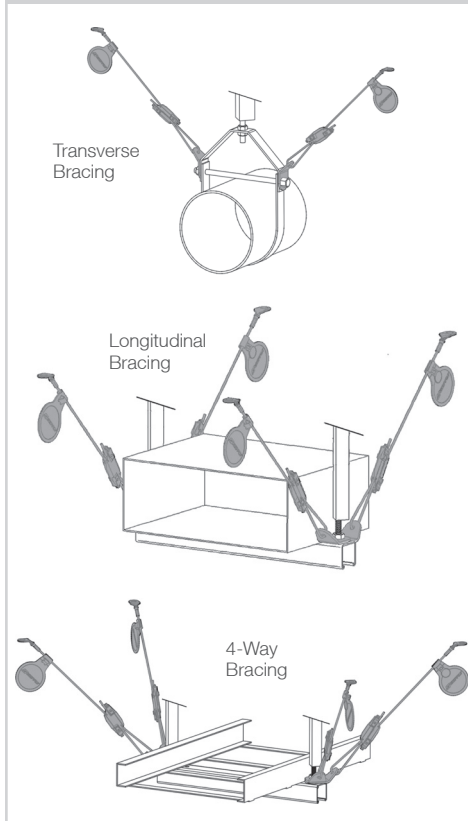

## SIZE SPECIFICATIONS

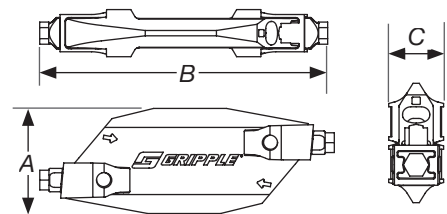


Seismic Fastener Size	Dimensions		
	A	B	C
GS10	1 9/64"	2 15/16"	33/64"
GS12	1 9/64"	3 1/4"	35/64"
GS19	1 11/32"	3 3/4"	9/16"
GS25	1 23/32"	4 21/32"	11/16"

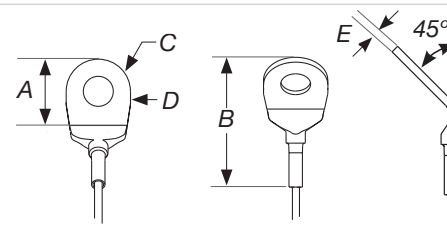


45° Eyelet Size	Dimensions				
	A	B	C Ø	D Ø	E
GSE4	1"	1 29/32"	53/64"	7/16"	1/8"

Hole in Eyelet accommodates a 3/8" fastener

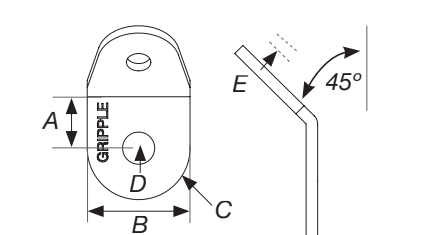

Standard Bracket Size	Dimensions				
	A	B	C Ø	D Ø	E
GSS4	25/32"	1 9/16"	1 9/16"	7/16"	5/32"
GSS5	13/16"	1 9/16"	1 21/32"	9/16"	5/32"
GSS6	13/16"	1 9/16"	1 21/32"	11/16"	5/32"
GSS8	1"	1 31/32"	1 31/32"	13/16"	5/32"
GSS10	1 1/16"	1 31/32"	1 31/32"	1 5/64"	5/32"

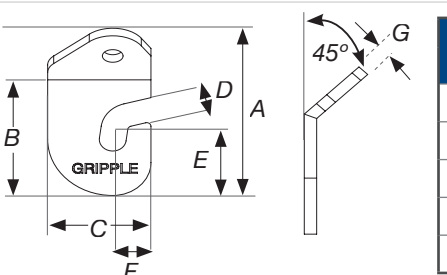

Retrofit Bracket Size	Dimensions						
	A	B	C	D	E	F	G
GSR4	3 45/64"	2 9/16"	1 31/32"	7/16"	1 1/16"	45/64"	1/4"
GSR5	3 3/4"	4 5/8"	1 31/32"	9/16"	1 5/16"	45/64"	1/4"
GSR6	3 3/4"	4 5/8"	1 31/32"	11/16"	1 5/16"	45/64"	1/4"
GSR8	4 9/64"	3 1/6"	2 1/4"	13/16"	1 13/32"	55/64"	1/4"
GSR10	9 7/16"	3 5/16"	2 7/16"	1 1/16"	1 17/32"	29/32"	1/4"

### Gripple Inc

1611 Emily Lane | Aurora, IL 60502 | USA

Tel 1 866 474 7753 Fax 1 800 654 0689

Email [grippleinc@gripple.com](mailto:grippleinc@gripple.com)

[www.gripple.com/us](http://www.gripple.com/us) [www.grippleseismic.com](http://www.grippleseismic.com)