

Fast Trak™ - Standard (for Mechanical & Plumbing)




Pre-fabricated trapeze bracket solution offering speed, flexibility and efficient use of space, for the installation of pipework, ductwork and other mechanical services, especially in restricted spaces.

FEATURES / BENEFITS

- **Quick** - up to six times faster to install than traditional suspension systems
- **Safe** - pre-fabricated system which removes the need to cut threaded rod or channel on-site
- **Tool free adjustment** - bracket can be moved up and down the tracks to accommodate changes in position during installation
- **Zero waste** - tracks bend neatly under bracket*
- **Space saver** - four-sided bracket provides suspension point on every face; ideal for pre-fab installations or multi-tiered configurations to accommodate additional services
- **Easy measurement** - indicators at each end of the bracket offer reference points when marking fixing points on the ceiling; level markers on tracks every 5 slots (2" / 50 mm increments) for easy leveling without tools
- **Neat & tidy** - system can be 'stacked' on-site to reduce storage requirements



INSTALLATION & ADJUSTMENT

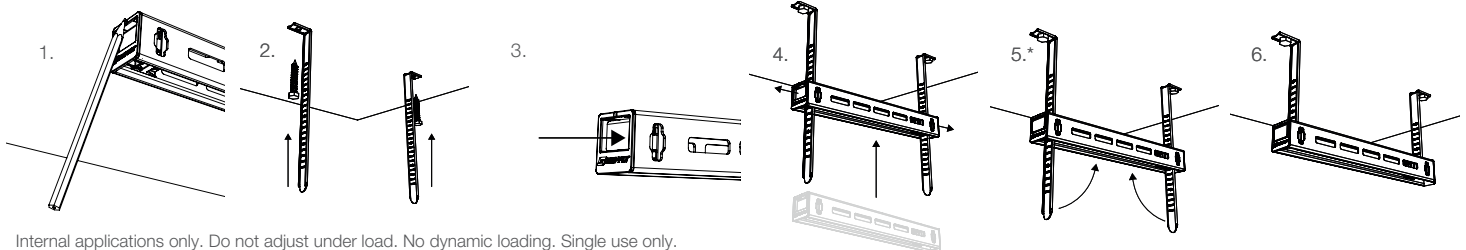


Internal applications only. Do not adjust under load. No dynamic loading. Single use only.


*Excess tracks can also be bent back and forth to snap off once bracket is levelled & secured for a neater finish. Bending tracks by hand is not recommended when excess is under 4" / 100 mm.

SPECIFICATION

Bracket

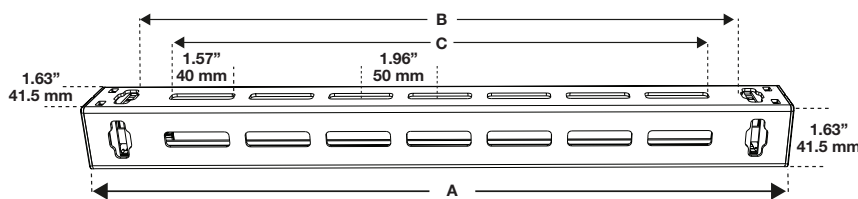

Track

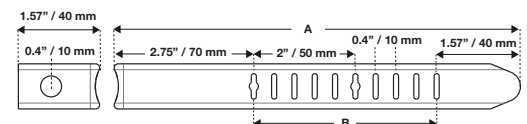

Track	A in (mm)	B in (mm)
FTT-8IN	7.9 (200)	3.5 (90)
FTT-12IN	11.8 (300)	7.5 (190)
FTT-16IN	15.7 (400)	11.4 (290)
FTT-20IN	19.7 (500)	15.4 (390)
FTT-24IN	23.6 (600)	19.3 (490)
FTT-28IN	27.6 (700)	23.2 (590)
FTT-31IN	31.5 (800)	27.2 (690)
FTT-35IN	35.4 (900)	31.1 (790)
FTT-39IN	39.4 (1000)	35.0 (890)
FTT-43IN	43.3 (1100)	39.0 (990)
FTT-47IN	47.2 (1200)	42.9 (1090)
FTT-51IN	51.2 (1300)	46.9 (1190)
FTT-55IN	55.1 (1400)	50.8 (1290)
FTT-59IN	59.1 (1500)	54.7 (1390)

Bracket	FTB-9IN	FTB-13IN	FTB-17IN	FTB-21IN	FTB-25IN	FTB-29IN	FTB-33IN
A (in / mm) Length	9.4 / 239	13.3 / 339	17.3 / 439	21.2 / 539	25.2 / 639	29.1 / 739	33.0 / 839
B (in / mm) Suspension Space	6.9 / 176	10.9 / 276	14.8 / 376	18.7 / 476	22.7 / 576	26.6 / 676	30.6 / 776
C (in / mm) Working Space	5.5 / 140	9.4 / 240	13.4 / 340	17.3 / 440	21.3 / 540	25.2 / 640	29.1 / 740
No. of Slots	3	5	7	9	11	13	15

Bracket	FTB-37IN	FTB-41IN	FTB-45IN	FTB-49IN	FTB-53IN	FTB-58IN	FTB-61IN
A (in / mm) Length	37.0 / 939	40.9 / 1039	44.8 / 1139	48.8 / 1239	52.7 / 1339	56.7 / 1439	60.6 / 1539
B (in / mm) Suspension Space	34.5 / 876	38.4 / 976	42.4 / 1076	46.3 / 1176	50.2 / 1276	54.2 / 1376	58.1 / 1476
C (in / mm) Working Space	33.1 / 840	37.0 / 940	40.9 / 1040	44.9 / 1140	48.8 / 1240	52.8 / 1340	56.7 / 1440
No. of Slots	17	19	21	23	25	27	29

SUBMITTAL INFORMATION

Safe Working Load:

Up to 650 lbs / 295 kg
(At Deflection = Bracket Length / 240)

See table on reverse page for maximum working loads.

Material:

Track & Bracket Material - BS EN 10346:2009
DX51D (Mild Steel) (Mild Steel, Pre-Galv Z275)

Cartridge Housing - ABS Plastic

Spring - BS 2056 Austenitic 302S26 G2

Latch - EN 10346

Approvals:

ICC-ESR-4622 approved

IAPMO approved

MFMA compliant

Lloyds certified

TUV and APAVE tested

PI-FASTTRAK-STANDARD-MECH-CAN

Published 07/21

www.gripple.com



Gripple's policy is one of continuous development and innovation.
We therefore reserve the right to alter specifications, etc. without notice.



Gripple Canada | 6665 Tomken Road | Units 9-10 | Mississauga | ON | L5T 2C4

Tel +1 905-458-8700 Email cainfo@gripple.com

Maximum Working Load (lbs / kg)*

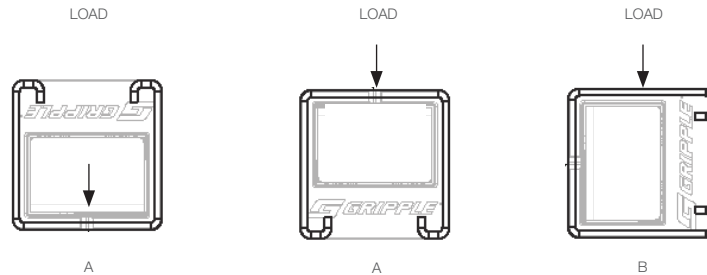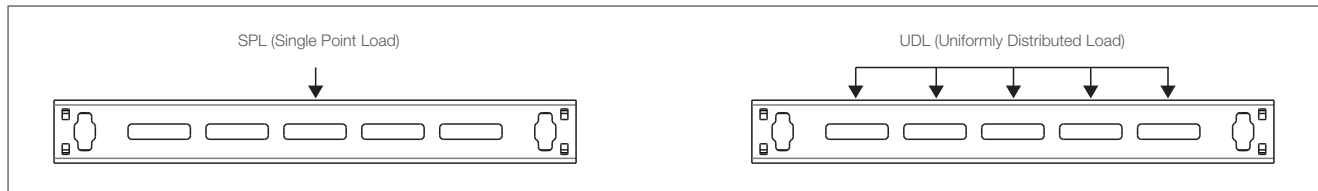

		L/240 SWL (lbs / kg) *				
FTB Bracket Code	Bracket Length (in / mm)	UDL (Orientation A)	Point Load (Orientation A)		UDL (Orientation B)	Point Load (Orientation B)
FTB-9IN			Above Mount	Below Mount		
	9.4 / 239	650 / 295	650 / 295	300 / 135	200 / 90	200 / 90
FTB-13IN	13.3 / 339	633 / 287	615 / 279		196 / 89	192 / 87
FTB-17IN	17.3 / 439	617 / 280	580 / 263		193 / 88	184 / 83
FTB-21IN	21.2 / 539	601 / 273	546 / 248		190 / 86	176 / 80
FTB-25IN	25.2 / 639	585 / 265	511 / 232		187 / 85	169 / 77
FTB-29IN	29.1 / 739	569 / 258	476 / 216		184 / 83	161 / 73
FTB-33IN	33.0 / 839	553 / 251	442 / 200		181 / 82	153 / 69
FTB-37IN	37.0 / 939	536 / 243	407 / 185		178 / 81	146 / 66
FTB-41IN	40.9 / 1039	520 / 236	373 / 169		175 / 79	138 / 63
FTB-45IN	44.8 / 1139	504 / 229	338 / 153		172 / 78	130 / 59
FTB-49IN	48.8 / 1239	488 / 221	303 / 137		169 / 77	123 / 56
FTB-53IN	52.7 / 1339	472 / 214	296 / 134	269 / 122	166 / 75	115 / 52
FTB-58IN	56.7 / 1439	456 / 207	234 / 106	234 / 106	163 / 74	107 / 49
FTB-61IN	60.6 / 1539	440 / 200	200 / 90	200 / 90	160 / 73	100 / 45

*For more details on specified loads or additional deflection ratings please contact Gripple Technical Services.
When loading multiple faces the total load applied must not exceed the values stated.