

# Universal Bracket for Electrical (UL Listed)




Gripple's Universal Brackets are designed for quick and easy support of electrical conduit and other electrical services, and are used in the same manner as strut. Our system is UL approved when suspended with our Gripple UniGrip cable hanger.

## FEATURES / BENEFITS


- **Quick** – pre-cut lengths eliminate the need for cutting channel on-site, allowing for a more productive use of labour
- **Versatile** – can be bolted directly to soffit or wall, or suspended from the soffit using a Gripple Cable Hanger, or threaded rod
- **Compatible** – uniform slots on three sides allow accurate alignment of Gripple clamps and Quick Twist accessories with the fourth side permitting the use of traditional channel / strut accessories
- **Safe** – improved health and safety as no tools or 'hot works' permit required for installation
- **Flexible** – perfect for pre-fab or multi-service installations



## INSTALLATION & ADJUSTMENT

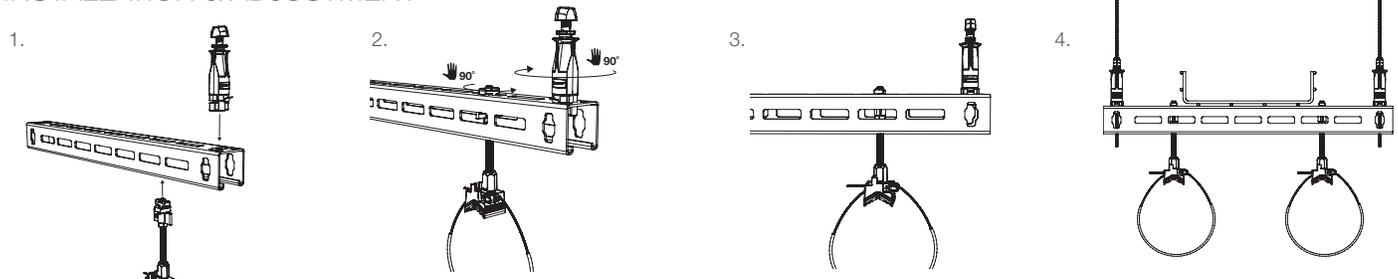

## SPECIFICATION

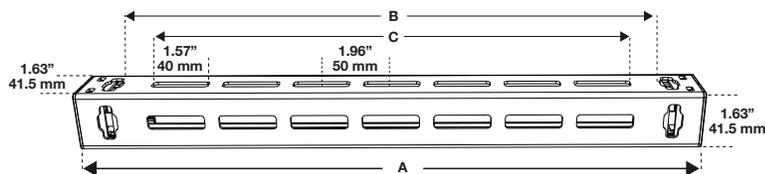


Bracket	UB-9IN	UB-13IN	UB-17IN	UB-21IN	UB-25IN	UB-29IN	UB-33IN
A (in / mm) Length	9.4 / 239	13.3 / 339	17.3 / 439	21.2 / 539	25.2 / 639	29.1 / 739	33.0 / 839
B (in / mm) Suspension Space	6.9 / 176	10.9 / 276	14.8 / 376	18.7 / 476	22.7 / 576	26.6 / 676	30.6 / 776
C (in / mm) Working Space	5.5 / 140	9.4 / 240	13.4 / 340	17.3 / 440	21.3 / 540	25.2 / 640	29.1 / 740
No. of Slots	3	5	7	9	11	13	15

Bracket	UB-37IN	UB-41IN	UB-45IN	UB-49IN	UB-53IN	UB-58IN	UB-61IN
A (in / mm) Length	37.0 / 939	40.9 / 1039	44.8 / 1139	48.8 / 1239	52.7 / 1339	56.7 / 1439	60.6 / 1539
B (in / mm) Suspension Space	34.5 / 876	38.4 / 976	42.4 / 1076	46.3 / 1176	50.2 / 1276	54.2 / 1376	58.1 / 1476
C (in / mm) Working Space	33.1 / 840	37.0 / 940	40.9 / 1040	44.9 / 1140	48.8 / 1240	52.8 / 1340	56.7 / 1440
No. of Slots	17	19	21	23	25	27	29

## RELATED PRODUCTS

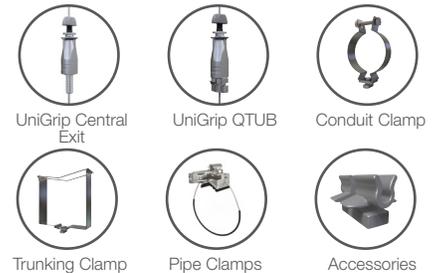

For more information on suspension methods contact us or visit [www.gripple.com](http://www.gripple.com)

## SUBMITTAL INFORMATION

### Load Rating:

Up to 480 lbs / 215 kg at 3:1 Safety Factor



### Material:

BS EN 10346:2009 DX51D  
(Mild Steel, Pre-Galv Z275)

### Approvals:


MFMA compliant  
UL Listed 2239  
Lloyds certified

## Maximum Working Load (lbs / kg)\*

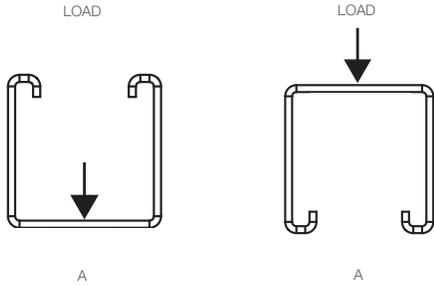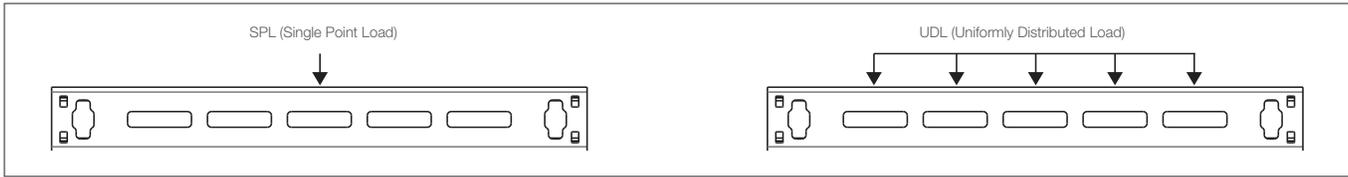

Hanger	Bracket	Max Allowed Point Load (lbs / kg)	UL Rated Kit SWL (lb / kg)	
UG2	UB-9IN	225 / 100	240 / 110	
	UB-13IN			
	UB-17IN			
	UB-21IN			
	UB-25IN			
	UB-29IN			
	UB-33IN			
	UB-37IN			
	UB-41IN			
	UB-45IN			
	UB-49IN			195 / 85
	UB-53IN			
UB-58IN				
UB-61IN				
UG3	UB-9IN	225 / 100	480 / 220	
	UB-13IN			
	UB-17IN			
	UB-21IN			
	UB-25IN			
	UB-29IN			
	UB-33IN			
	UB-37IN			
	UB-41IN			
	UB-45IN			
	UB-49IN			195 / 85
	UB-53IN			
UB-58IN				
UB-61IN				

### Gripple UL Rated System (Universal Bracket/UniGrip Cable Hanger)

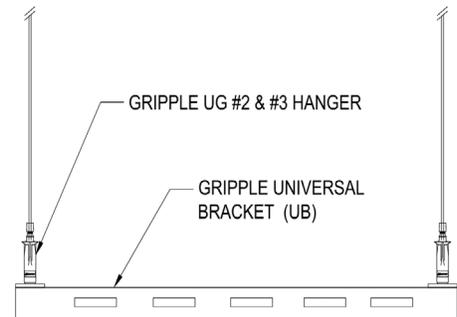

\*For more details on specified loads or additional deflection ratings please contact Gripple Technical Services. When loading multiple faces the total load applied must not exceed the values stated.