

Designed for architectural lighting suspensions, signage, acoustic baffles and all other installations where aesthetics are important.


FEATURES / BENEFITS

- Aesthetic the design complements modern building design
- Discreet supplied with 1/16" / 1.5 mm cable for a unobtrusive suspension
- Quick ergonomic button allows for easy, rapid adjustment
- Strong 33 lb / 15 kg SWL to accommodate a wide range of fittings
- Versatile variety of different foot options and end fixings for attachment to a wide range of products and substrates
- Safe no tools or 'hot works' permit required for installation, improving health and safety on-site




INSTALLATION & ADJUSTMENT

1.





SPECIFICATION



Dimension	Inches	mm
А	5/8"	16 mm
В	7/8"	21.5 mm
С	7/16"	11.5 mm

AVAILABLE END FIXINGS







For more options on available end fixings please contact us or visit www.gripple.com

SUBMITTAL INFORMATION

Safe Working Load:

33 lb / 15 kg @ 5:1 safety factor

The safe working load is calculated based on the cable exiting on axis. For off-axis please contact Gripple Canada Technical Services.

Material:

Housing - No. 2 Zinc Alloy (EN 12844 ZP2) Roller - Brass (BSEN 12164)

Spring - Acetol (POM)

Plating - Bright Nickel Plating (BS 4758)

Approvals:

CSA Approved UL Listed (1598) Not suitable for use in chlorinated / swimming pool environments.




























The Angel is now even more versatile with a wide range of feet available to suit your application.




- Dual fixing points for balance
- 6" / 150 mm, 12" / 300 mm and 18" / 460 mm leg lengths as
- Legs available with a variety of cable end fixings eg. Toggle, Snap Hook etc.



Dimension	А	В	С	D
Inches	5/18"	1 1/18"	Ø 7/16"	6, 12 or 18"
mm	16 mm	28.5 mm	Ø 11.5 mm	150, 300 or 460 mm






- Ideal for light fittings, signage, or for use with eyebolts, spring and cable anchors
- Safety clasp for security
- Integrated Side Hook with 3/16" / 4.5 mm clearance
- Sido cablo ovit

•	Side cable exit				
	Dimension	А	В	С	D
	Inches	5/8"	1 7/8"	5/8"	3/16"
	mm	16 mm	47.5 mm	16 mm	4.5 mm


Side Exit Female



- Threaded female foot, ideal for direct attachment to light fittings, frames and acoustic panels
- Side cable exit
- Available in M4, M6 and 1/4" thread
- Maximum insertion depth 1/4" / 6 mm

Dimension	А	В	С	D	Е
Inches	5/8"	1 3/8"	Ø 7/16"	Max 1/4"	M4, M6 or 1/4"
mm	16 mm	47.5 mm	Ø 11.5 mm	Max 6 mm	thread

Mini Helix



- The helical screw binds layers of polyester fibre to form a strong anchoring point
- Tilt to one side, acting as a lever for even easier insertion
- Press the Angel wings to easily release the wire for height adjustment
- Swivel up to 45 degrees to avoid existing services or suspend circular panels (always consider reduction in SWL when hanging at angles)

Dimension A		В	D	
Inches	Ø 3/8"	2 1/2"	15/16"	
mm	10 mm	64 mm	24 mm	




























The Angel is now even more versatile with a wide range of feet available to suit your application.






- Swivel feature for suspension at angles up to 90°
- Male and Female versions available
- Male: 9/16" /15 mm exposed thread length as standard (M6)
- Threads available are M4, M6, M8 and 1/4" thread
- Female: maximum insertion depth 1/4" / 6 mm



Dimension	А	В	С	D	E
Inches	5/8"	1 7/8"	Ø 7/16"	Max 1/4"	M4, M6, M8 or
mm	16 mm	47 mm	Ø 11.5 mm	Max 6 mm	1/4" thread

Side Exit Male




- Threaded male foot, ideal for direct attachment to light fittings, frames and acoustic panels
- Side cable exit. Available in M4, M6 and 1/4" thread as standard. M5, M8, M10 and M13 adapters available
- 9/16" / 15 mm exposed thread length as standard (1/4"), custom lengths available on request



Dimension	А	В	С	D	E
Inches	5/8"	1 3/8"	Ø 7/16"	5/8"	M4, M5, M6, M8, M10,
mm	16 mm	35 mm	Ø 11.5 mm	16 mm	M13 or 1/4" thread

Signage




- Ideal for signage up to 3/16" / 5 mm in thickness
- Grub screw for direct attachment
- Side cable exit
- Available with a variety of cable end fixings



Dimension	А	В	С	D	Е
Inches	5/8"	1 7/16"	Ø 7/16"	7/16"	3/16"
mm	16 mm	37 mm	Ø 11.5 mm	11.5 mm	5 mm

Signage Rail



- Ideal for suspending signage or panels (on rail or by screws)
- Two screw holes (ø 3/16" / 5 mm) for direct attachment
- Central exit



Dimension	А	В	С	D	Е	F
Inches	5/8"	1 3/8"	2"	1 3/8"	5/8"	3/16"
mm	16 mm	35 mm	50 mm	35 mm	15 mm	5 mm
























Angel Feet

The Angel is now even more versatile with a wide range of feet available to suit your application.

V-Bracket (VHM/VSM)




- · Lighting Fixture Hanger for Linear fixture and strips
- Available in Forward Mount (VFM) & Side Mount (VSM)
- Side cable exit



Dimension	А	В	С	D	Е
Inches	5/8"	1 7/16"	Ø 7/16"	7/16"	3/16"
mm	16 mm	37 mm	Ø 11.5 mm	11.5 mm	5 mm

Central Exit




- Threaded male foot, ideal for direct attachment to light fittings and frames
- Central cable exit. Available in M6 and 1/4" thread, as standard
- 3/16" / 5 mm exposed thread length as standard, custom lengths available on request



Dimension	А	В	С	D	Е
Inches	5/8"	1 3/8"	Ø 7/16"	3/16"	M6 or 1/4" thread
mm	16 mm	35 mm	Ø 11.5 mm	5 mm	IVID OF 1/4 LITERACE

Knockout




- Ideal for lighting with standard 7/8" / 22 mm knockout holes
- Slots into knockout centers and twists to lock into place
- No tools required
- Available with a variety of cable end fixings
- No internal access required to light fitting




Dimension	А	В	C (Hole Size)	D	Е
Inches	5/8"	1 3/8"	Ø 7/8"	1/2"	1"
mm	16 mm	35 mm	Ø 22 mm	12 mm	25 mm

GT



- Designed for use specifically with Global Pro lighting track
- Simple, 'clip on' design
- Ergonomic button allows for quick and easy adjustments
- Supplied as a ready to use hanger, with GT clip pre-attached to Angel body
- Contemporary design to complement the overall suspension



























Angel Feet

The Angel is now even more versatile with a wide range of feet available to suit your application.

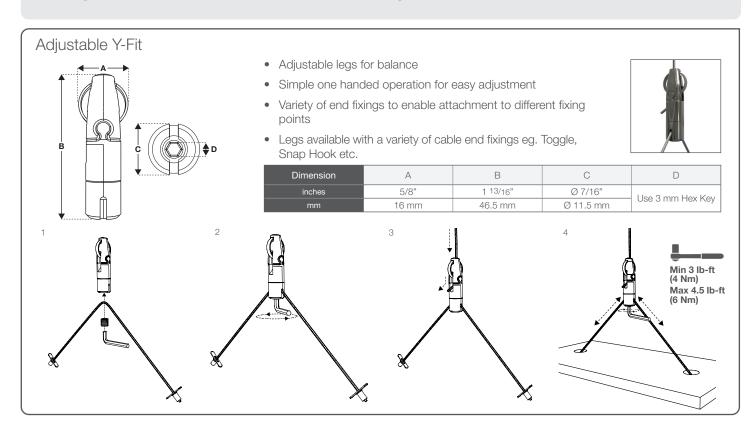

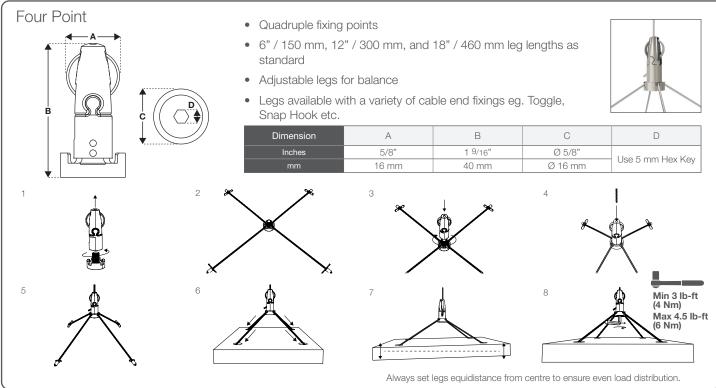






















Angel Feet

The Angel is now even more versatile with a wide range of feet available to suit your application.

T19



- Designed to accommodate smaller track profiles of up to 3/4" / 19 mm internal width for the suspension of acoustic, display, signage and lighting solutions
- Squeeze ergonomic wings for easy one-handed height alterations
- Supplied as a ready to use hanger and includes a 9/16" / 14 mm washer
- Rectangular t-foot fits a wide range of tracks



Dimension	А	В	С	d	а	W	t
inches	11/16"	1 9/16"	1/2 "	1/4" / 1/2" *	Min. 1/4" Max. 3/8" (without washer) Max. 1/2" (with washer)	1/2" / 3/4"	Max 5/32" (without washer) Max 3/32" (with washer)
mm	17.5 mm	40.1 mm	12.3 mm	6 mm / 12 mm *	Min. 6 mm Max. 9.5 mm (without washer) Max. 12 mm (with washer)	12.4 mm / 19 mm	Max 3.75 mm (without washer) Max 2.35 mm (with washer)

^{*} Max 3/8" / 9.5 mm without washer



















