


# UniGrip - Central Exit




The next generation of cable suspension products designed for the fast suspension of electrical conduits & tray, pipework, ductwork and HVAC systems, including multi-tier installations.

## FEATURES / BENEFITS


- **Quick** – up to 6 times faster than traditional suspension systems
- **Safe** – can be pre-installed to channel using pre-fitted washer / nut
- **Easy** – integral ergonomically designed release button allows for simple adjustment
- **Secure** – button acts as a locking screw and indicator clearly highlights the cable is locked in position for ultimate security
- **Versatile** – Supplied with either a square washer and channel nut or hex nut
- **Strong** – highest load rating capability to date up to 550 lb / 250 kg with 5:1 SWL

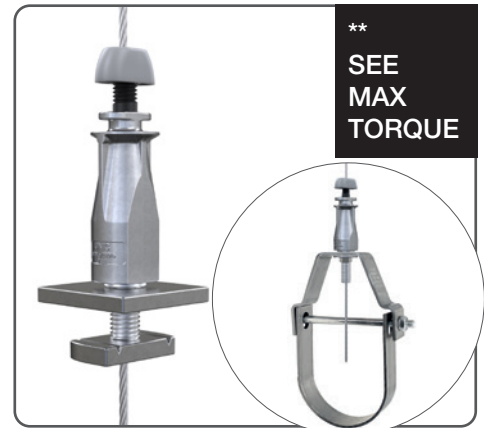

## INSTALLATION & ADJUSTMENT

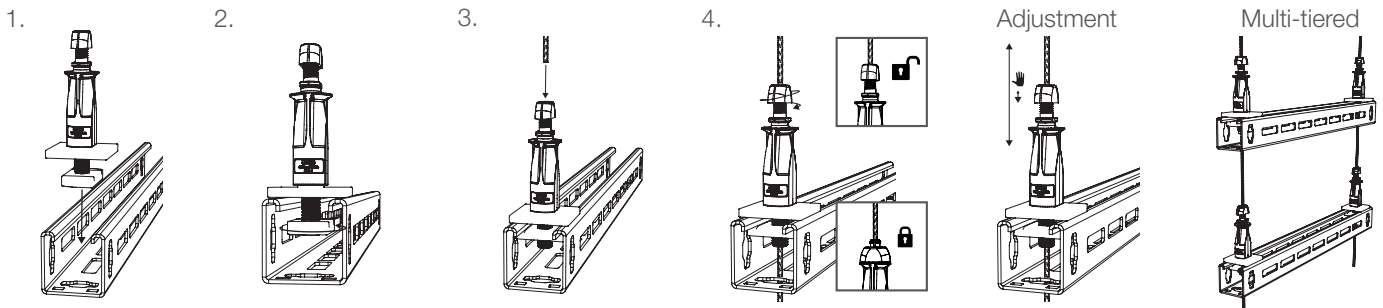


## SPECIFICATION

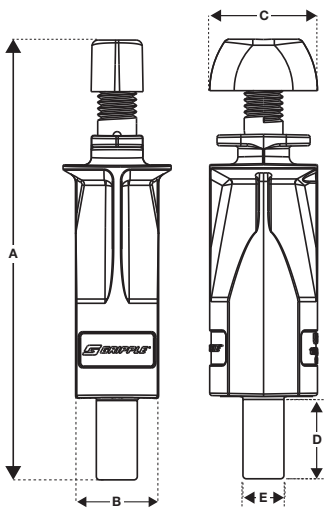

No.	Dimension	A	B	C	D	E
No. 2	Inches	3 3/16"	11/16"	13/16"	1"	3/8"
	mm	81 mm	17 mm	20 mm		
No. 3	Inches	3 7/8"	11/16"	7/8"	1"	3/8"
	mm	99 mm	17 mm	22 mm		
No. 4	Inches	4 1/2"	7/8"	1 3/16"	1"	1/2"
	mm	115 mm	22 mm	30 mm		
Foot	Thread – Mild Steel (Type EN1A) - Bright Zinc Plated					

Maximum off axis suspension = 15° (Unless otherwise specified by GripPle Technical Services). The safe working load is calculated based on the cable exiting on axis. For off-axis please contact GripPle Canada Technical Services. \*\* Maximum torque value to be applied, No. 2 and No. 3 = 4 lb-ft (5Nm), No. 4 = 18 lb-ft (25Nm)

## AVAILABLE END FIXINGS

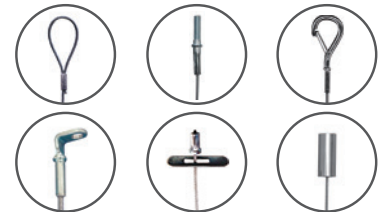

For more options on available end fixings please contact us or visit [www.grippl.com](http://www.grippl.com)

## SUBMITTAL INFORMATION

### Load Rating:

No. 2 - 120 lb / 55 kg at 5:1 safety factor  
No. 3 - 240 lb / 110 kg at 5:1 safety factor  
No. 4 - 550 lb / 250 kg at 5:1 safety factor

### Material:

Housing - Type ZA2 Zinc  
Carriage - Acetal Copolymer  
Wedge - Sintered steel hardened to min. 56 Rockwell C  
Button - Acetal Copolymer

### Approvals: CSA & UL 1598 & UL 2239

NOT suitable for use in chlorinated / swimming pool environments.

