

# UniGrip - Hook



The next generation of cable suspension products designed for the fast suspension of electrical conduits & tray, pipework, ductwork and HVAC systems, including multi-tier installations.

## FEATURES / BENEFITS

- **Quick** – up to 6 times faster than traditional suspension systems
- **Versatile** – designed for heating / cooling panels and light fittings
- **Easy** – integral ergonomically designed release button allows for simple adjustment. Side cable exit
- **Secure** – button acts as a locking screw and indicator clearly highlights the wire is locked in position for ultimate security. Self closing latch for security
- **Strong** – highest load rating capability to date; up to 120 lb / 55 kg with 5:1 SWL




## INSTALLATION & ADJUSTMENT


1.




2.



3.



## SPECIFICATION

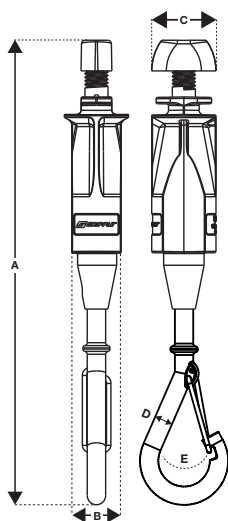


No. 2	Dimension	A	B	C	D	E
	Inches	5 9/16"	11/16"	13/16"	Ø 1/4"	5/16"
	mm	140	17	20	Ø 6	8

Foot Hook Adaptor – Mild Steel (Type EN1A) - Bright Zinc Plated

Maximum off axis suspension = 15° (Unless otherwise specified by Grippler Technical Services). The safe working load is calculated based on the cable exiting on axis. For off-axis please contact Grippler Canada Technical Services.

## AVAILABLE END FIXINGS

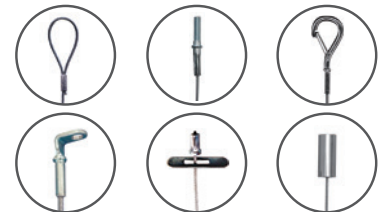

For more options on available end fixings please contact us or visit [www.grippler.com](http://www.grippler.com)

## SUBMITTAL INFORMATION

### Load Rating:

No. 2 - 120 lb / 55 kg at 5:1 safety factor

### Material:

Housing - Type ZA2 Zinc

Carriage - Acetal Copolymer

Wedge - Sintered steel hardened to

min. 56 Rockwell C

Button - Acetal Copolymer

Approvals: CSA & UL 1598 & UL 2239

NOT suitable for use in chlorinated / swimming pool environments.

