

End Fixing

For fastening through profile roof cladding, light fittings and other cavities.


FEATURES / BENEFITS

- Ideal when used as a Y-Fit to suspend lighting
- Available to fit 1/4", 5/16" and 13/32" for use with No. 1, No. 2, and No. 3 fasteners, with up to 5:1 safety factor
- Supplied as a ready-to-use kit with Gripple hanger and length of cable
- Available in lengths from 5 ft to 30 ft (other lengths available upon request)
- Independently certified
- Also available in Stainless Steel




INSTALLATION


1.




2.



3.



SPECIFICATION

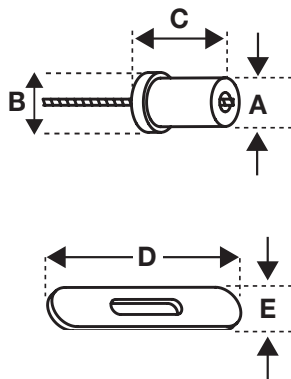

Size	A ∅		B ∅		C		D		E	
	in	mm	in	mm	in	mm	in	mm	in	mm
No. 1	5/32	4	7/32	5.5	5/16	8	19/16	40	7/32	5.5
No. 2	5/32	4	7/32	5.5	15/32	12	19/16	40	7/32	5.5
No. 3	1/4	6	5/16	8	15/32	12	19/16	40	5/16	8
	1/4	6	3/8	9.5	11/16	17	2	50	3/8	9.5

SUBMITTAL INFORMATION

Safe Working Load:

Refer to fastener load ratings and safe working loads

Material:

Toggle plate - Zinc plated steel


End Stop - Zinc plated steel

Approvals:

Lloyds certified

UL Listed

AVAILABLE FASTENERS

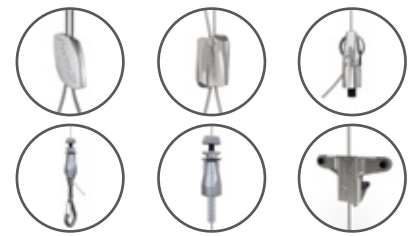

For more options on available fasteners please contact us or visit www.gripple.com

IMPORTANT RECOMMENDATIONS

1. Construction materials and conditions vary on different sites. If it is suspected that the base material has insufficient strength to achieve a suitable fixing, contact Gripple Canada Inc. The responsibility for judgement of base material strength lies with the installer, and not with Gripple Canada Inc.
2. Not to be used in marine, coastal or corrosive environments.
3. The information and recommendations given herein are believed to be correct at time of writing. The data has been obtained from tests done under laboratory, or other controlled conditions and it is the user's responsibility to use the data given in light of conditions on site, taking account of the intended use of the products concerned.
4. Whilst Gripple Canada Inc. can give general guidance and advice, the nature of Gripple products means that the ultimate responsibility for selecting the correct product for a particular application must lie with the customer.
5. All products must be used, handled and applied in accordance with current product instructions and manufacturers recommendations for use, published by Gripple Canada Inc.