

Spider (Wood Form)




Universal, versatile, cast-in-place insert for wood form construction, allowing for fast and easy suspension of all building services.

FEATURES / BENEFITS

- **Universal** – one insert accommodates No. 2 – No. 5 swivel cable toggle kits
- **Versatile** – universal design allows decision on cable size to be made after the slab is poured
- **Simple** – allows the specification and stocking of one insert for all requirements, simplifying procurement through to installation
- **Robust** – low profile design aids impact protection; insert doesn't displace when kicked or knocked on site
- **Strong** – up to 3000 lb / 1360 kg safe working load (always depends on structure and insert element size). Also tested for seismic loads, contact Gripple for more information
- **Secure** – four wire anchors secure into concrete and ultrasonically welded head eliminates ingress during pour
- **Fast** – below deck install saves time due to swivel toggle technology on cable hangers; no assembly required, dramatically reducing installation time



INSTALLATION

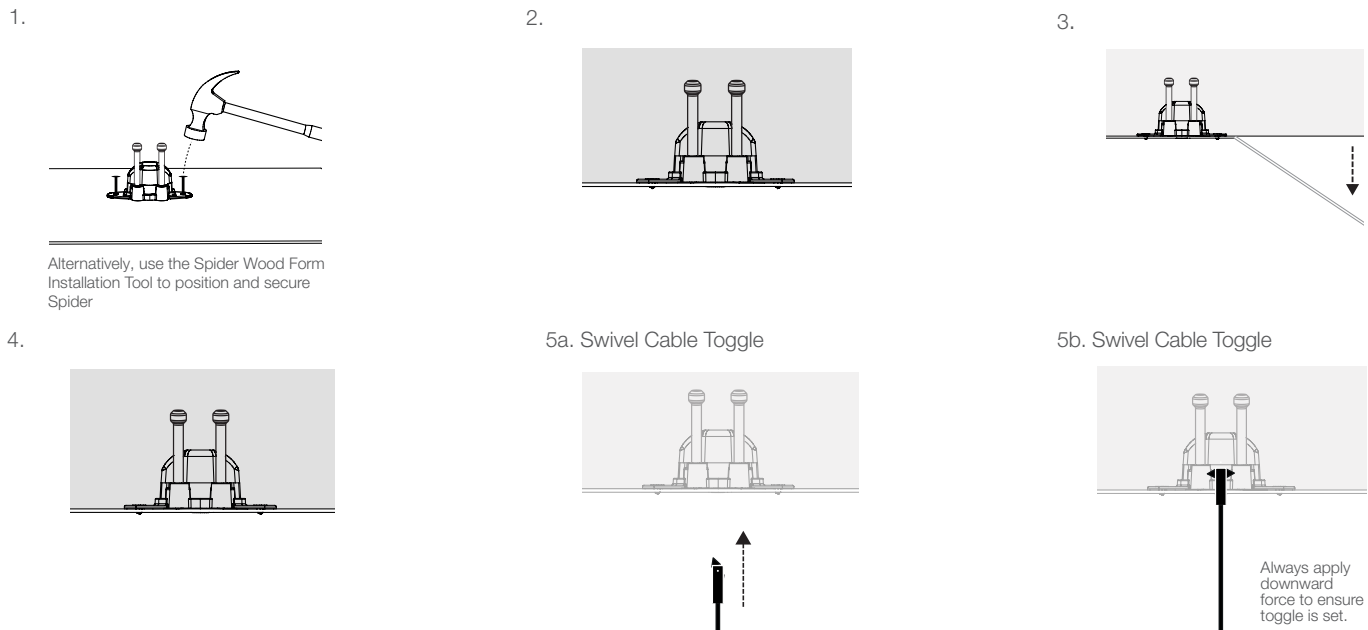

SUBMITTAL INFORMATION

Load Rating:

Up to 3000 lb / 1360 kg (always depends on structure and insert element size)

Swivel Cable Toggle*

Refer to fastener load ratings & safety factors

Material:

Base - ABS

Head - ABS

Cable - 7 x 19, 1/4" / 6 mm galvanized steel

Approvals:

ICC-ES ESR 4190

UL 2239

UL 2043

CSA

* Please check the safe working load of hanging system before installing. The system's safe working load may be downgraded to that of the cable hanger.

RELATED PRODUCTS



Swivel Cable Toggle



Seismic Brace Adaptor



Spider Wood Form Installation Tool

For more options on available products please contact us or visit www.gripple.com